


RB433UL

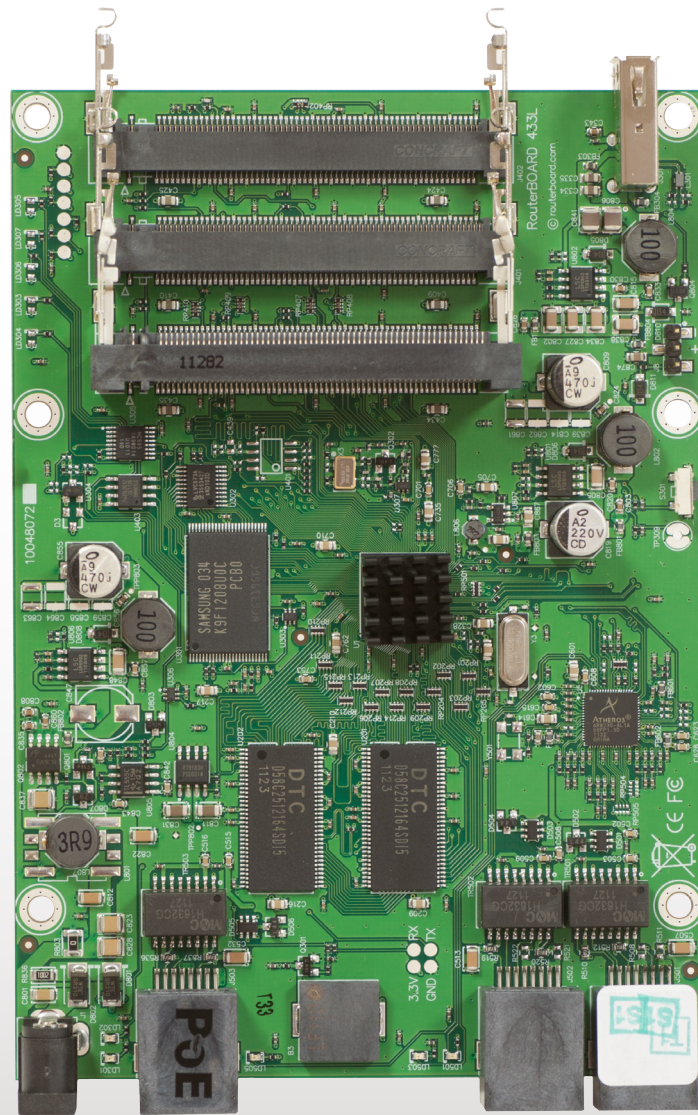

The RB433UL has three miniPCI slots, three Ethernet ports and one USB port for storage or a 3G modem.

Use this device in an outdoor case for a sector AP installation, or for a wireless point to point link.

It's powered by an Atheros 300MHz CPU, has 64MB of RAM and a Level4 RouterOS license.

CPU	Atheros AR7161 300MHz
Memory	64MB DDR SDRAM onboard memory
Boot loader	RouterBOOT
Data storage	NAND memory chip
Ethernet	Three 10/100 Mbit/s Ethernet ports with Auto-MDI/X
miniPCI	Three MiniPCI Type IIIA/IIIB slots
Expansion	One USB 2.0 port with powering (5V 1A supply)
Extras	Reset switch, beeper, voltage monitor
Serial port	-
LEDs	Power, NAND activity, 5 user LEDs
Power options	PoE: 8-28V DC on Ether1 (Non 802.3af). Jack: 8-30V DC
Dimensions	105 mm x 154 mm, Weight: 137g
Power consumption	2W board only, 14W available to miniPCI cards
Operating System	MikroTik RouterOS, L4 license